
NE610	—	24	—	10	—	AA	—	67	—	80	—	DD
Model		Voltage		Width		CCT		IP		CRI		Length
		24: 24V		10: 10mm		2700K + RGB 3000K + RGB 3500K + RGB 4000K + RGB 5000K + RGB 6500K + RGB		67: IP67 (Wet)		80: 80+		5m Customized

c UL us LISTED E509236

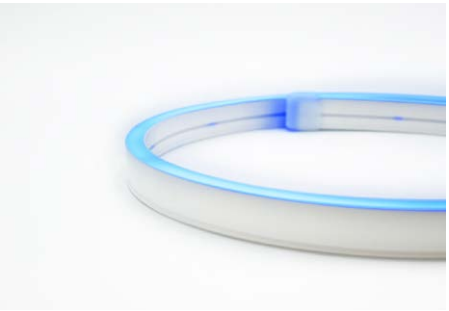

Color	Power	Brightness	Luminous Efficacy
Red	5.49 W/ft	4.0 lm/ft	0.7 lm/W
Green	5.49 W/ft	11.0 lm/ft	2.0 lm/W
Blue	5.49 W/ft	2.1 lm/ft	0.4 lm/W
2700K	5.49 W/ft	11.6 lm/ft	2.1 lm/W
3000K	5.49 W/ft	12.2 lm/ft	2.2 lm/W
3500K	5.49 W/ft	12.5 lm/ft	2.3 lm/W
4000K	5.49 W/ft	12.5 lm/ft	2.3 lm/W
5000K	5.49 W/ft	12.8 lm/ft	2.3 lm/W
6500K	5.49 W/ft	12.8 lm/ft	2.3 lm/W

Project	
Qty	
Date	
Client	

Standard CCT

RGB + 2700K

RGB + 3000K

RGB + 3500K

RGB + 4000K

RGB + 5000K

RGB + 6500K

Waterproof Solution

IP67
Silicone Extrusion


Wet location
Short time under water

Style	Side-Bend (RGBW)
Dimension	W10 x H20mm (W0.39 x H0.79in)
Input Voltage	24VDC
Beam Angle	120°
CRI	80+
Power	18W/m (5.49W/ft)
Max. Length (No Voltage drop)	5m (16.4ft)
Cut Length	71.4mm/unit (2.81in/unit)
Minimum bending diameter	120mm (4.72in)
Minimum twist degree	8°/71.4mm (2.81in)
IP Grade	IP67
Operating Temperature	-20°C~45°C
Lifespan	36,000h (indoor), 3 year warranty
LED CCT & Wavelength	White: 2700K; 3000K; 3500K; 4000K; 5000K; 6500K + Red + Green + Blue
Dimming Method	PWM (dimmable driver like RF, Bluetooth, 0/1-10V,Triac, DALI, DMX, WIFI etc.)
Addressable and pixel controllable	By SPI & DMX signal, with TM2904 & TM512AC smart IC design
Certification	UL, CE, RoHS

c UL us LISTED E509236 CE RoHS REACH

Parameters above allow 10% floating

DIMENSION

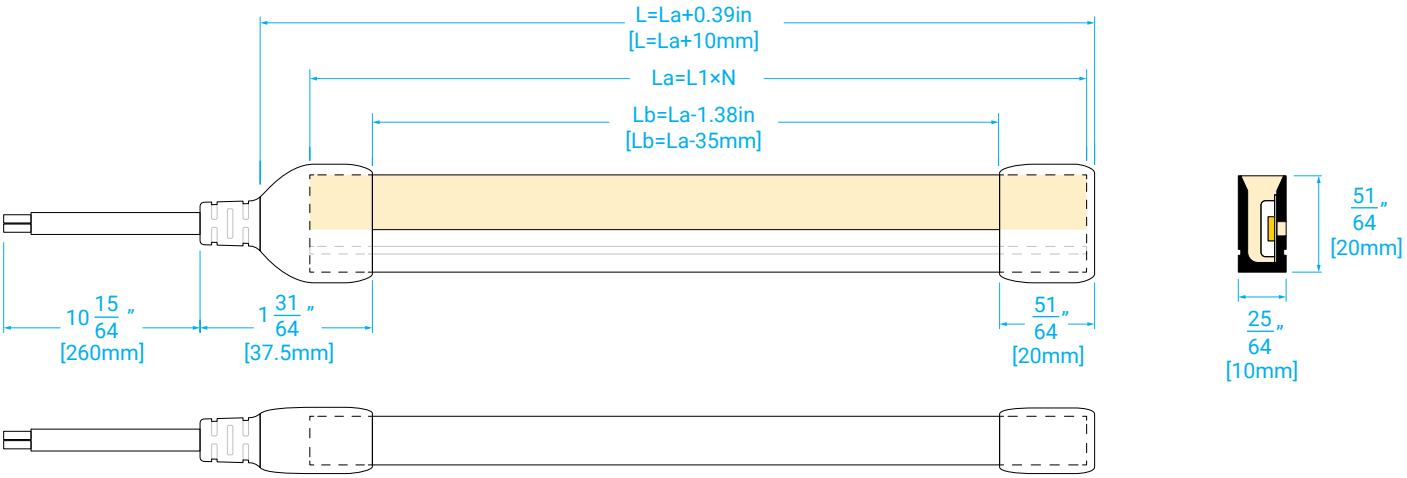

** L: Total length; La: LED strip length; Lb: Illummination surface length; L1: Minimum cutting unit; N: 1, 2, 3...*
** The wiring kit in the diagram above is rear power cable, side and bottom power cable are also available.*

ACCESSORIES



NE610-BR

Bottom mounting brackets for flexible LED neon strip light NE610.



NE610-RC

Rigid Aluminum channel for flexible LED neon strip light NE610.



NE610-FC

Flexible Aluminum channel for side bend LED neon strip light NE610.



NE610-WK

Power cable wiring kit for LED neon strip light NE610. [Rear/Side/Bottom]

NE610-WK-RR



NE610-WK-SD



NE610-WK-BT

